

BILLET

HONEYCOMB REMOTE - WET LOCATION

bold
lighting



The Billet family of products allows you to achieve uniformity throughout indoor and outdoor spaces while maintaining the same optical performance, light consistency, and overall aesthetics.

The Billet Honeycomb was designed to provide unmatched performance and a decorative aesthetic while maintaining minimal glare. The Billet confidently delivers a flawless light distribution and a beautifully finished product.

CONSTRUCTION

Product Type : Linear
Body Material : Extruded Aluminum
Body Finish : Black / Grey / White
 Custom RAL

IP Rating : IP67 Inground

IP66 Ceiling Recessed

IK Rating : IK10

Drive Over Rating : Billet Inground is designed to bear static loads up to 2500 lbs. from vehicles with pneumatic tires. This product is not intended to be used for traffic lanes. Chicago plenum rated

INSTALLATION

Environment : Wet Location

Mounting : Inground
 Ceiling Recessed (Trim & Trimless)
 Wall Recessed (Trim & Trimless)
 Surface Mounted / Pendant

OPTICS

Optical Distribution : 10° / 20° / 35° / 50°
 Elliptical (10°x40°) (25°x50°)

Glare Control : UGR<19

LIGHT SOURCE

Direct Light Source : Hi-power LEDs

Luminous Output : from 1405lm/m to 4500lm/m (Delivered)

Light Source CCT : 2700K / 3000K / 3500K
 4000K / Tunable White (2700K-5000K)

Color Rendering Index : Ra90

Lifetime : L80 B10 @ 70,000 Hrs

ELECTRICAL

Input Voltage : 220-240V / UNV 120-277V - 50Hz/60Hz

Load : 16W/m to 66W/m

Output Type : Constant Voltage

Driver Type : Remote

Dimming : 0-10V / DALI / ELV / DMX / Lutron Hi-Lume

Code Compliance : ETL / CSA / CE

Series	Mounting	Nominal Length ¹
BHS	R Recessed with Trim	12 300 mm
	T Recessed Trimless*	24 600 mm
	S Surface Mounted	36 900 mm
	P Pendant	48 1200 mm
	I Inground*	60 1500 mm
		XX Custom mm

* For Inground "I" and Recessed Trimless "T" mountings, the housings will show on the price quote and order as a separate item to allow us to ship them ahead of the fixtures if required by the contractor.

For custom lengths and shapes, consult factory.
 For exact lengths refer to dimensions table.

Code example: **BHS** - P12W - L2H - W - E927 - 0

Body Finish	Output	Voltage	Dimming	Baffles	Beam Angle	CRI	Color Temp	Emergency
B Black	L² 1405lm/m (16W)	2 220-240V	H Non Dim	W Flat White	S 10°	9 +90	27 2700K	0 No
G Grey	M² 2450lm/m (33W)	U⁴ Universal 120 to 277V	I 0-10V to 1%	B Flat Black	M 20°		30 3000K	9 90 mins
W White	H² 3375lm/m (49W)		K Dali to 1%	N Black Nickel	F 35°		35 3500K	
X Custom RAL	V² 4500lm/m (66W)		L ELV	C Specular Chrome	W 50°		40 4000K	
	U³ 2450lm/m (33W)		M DMX	E Diffuse Gold	E 10°x 40°		TW 2700K - 5000K	
	A³ 4500lm/m (66W)		N⁵ LUTRON	X Custom	E 25°x 50°			

Notes:

¹ 150 mm length increments available as a modification.

² Denotes output at 3000K, unless otherwise noted.

³ Denotes output specific to Tunable White at full on.

⁴ Not applicable for ELV dimming.


⁵ Hi-lume, Vive, and Athena compatible.

Consult factory for lead-times.
 Consult factory for systems using multiple optics and mounting configurations.




Bold Lighting
 4710 Ecton Dr., Marietta, GA 30066, USA
 info@boldlighting.us www.boldlighting.us t: +1-678-903-4061

OPTICAL FLEXIBILITY

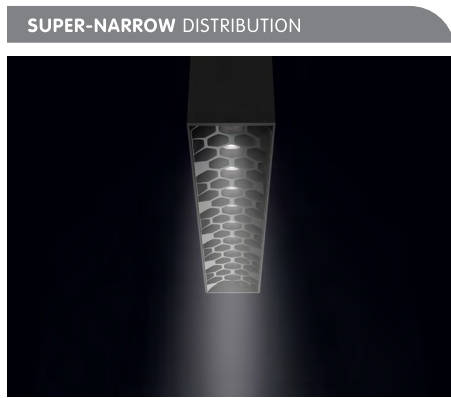


10° Beam Angle




A super-narrow 10° optic is ideal for high-ceiling applications and for emphasizing texture on vertical surfaces and architectural elements.




20° Beam Angle




The narrow 20° beam can be used to provide a subtle graze around a perimeter or on vertical surfaces. It is also ideal for general illumination where double or triple height spaces present challenges.

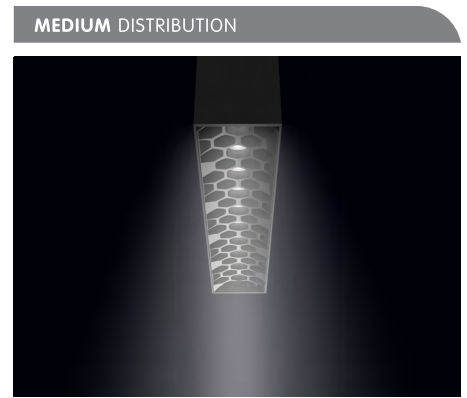


35° Beam Angle



The 35° medium beam is a versatile distribution that can be used in a wide range of spaces and is a good balance between light punch and ambient uniformity.

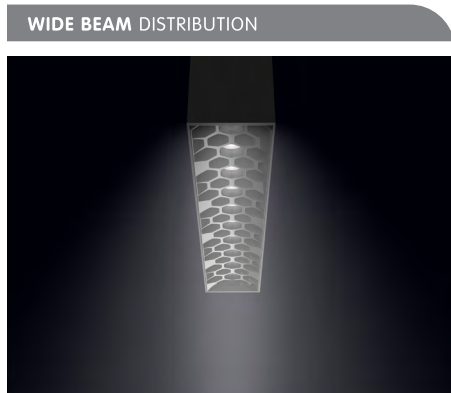


50° Beam Angle



The 50° wide beam is a versatile distribution that can be used in a wide range of spaces and is a good balance between light punch and ambient uniformity.




10° x 40° Beam Angle




The elliptical beam is optimal for grazing applications and is an effective solution for the illumination of long narrow spaces.

25° x 50° Beam Angle





MOUNTING FLEXIBILITY
Per Millimeter


SURFACE MOUNTED

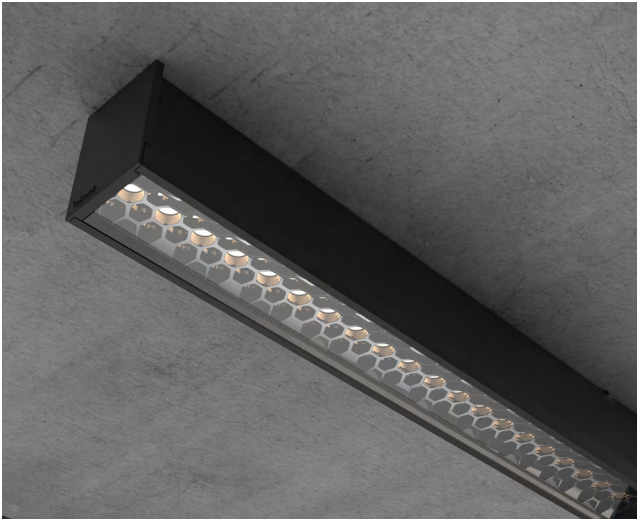


Actual (mm)
L= 622 | 922 | 1222 | 1522 |
Continuous runs
W= 72
H= 91

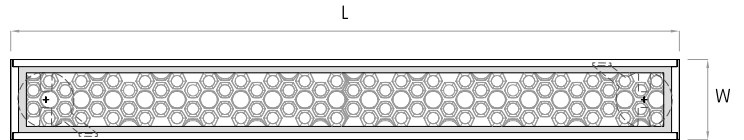
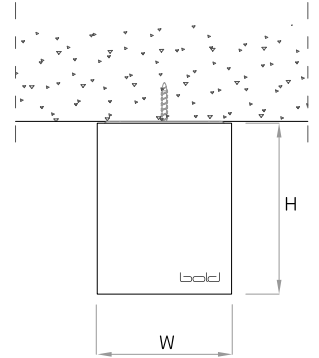


RECESSED WITH TRIM

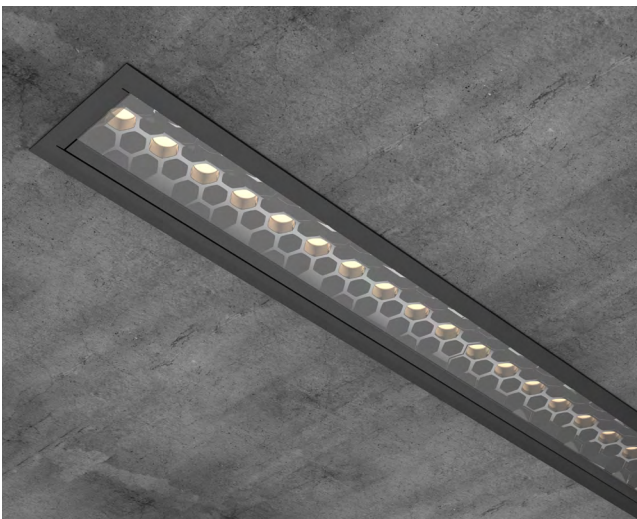

 (L-20 x W-20)


Actual (mm)
L= 334 | 634 | 934 | 1234 |
1534 | Continuous runs
W= 80
H= 91

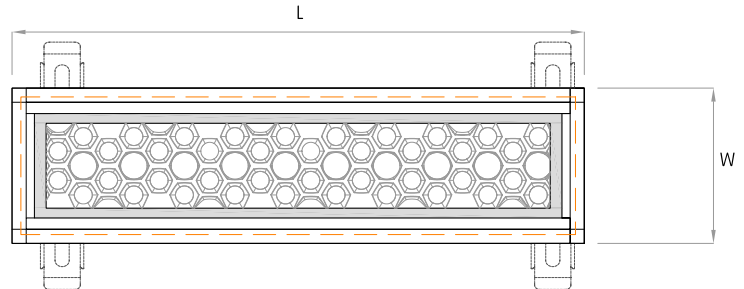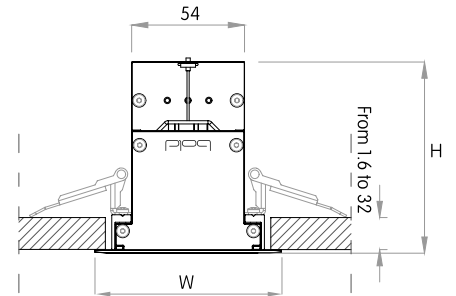



MOUNTING FLEXIBILITY
Per Millimeter

RECESSED TRIMLESS




 (L+1.6 x W+1.6)



Actual (mm)
L= 624 | 924 | 1224 | 1524 |
Continuous runs
W= 75
H= 97

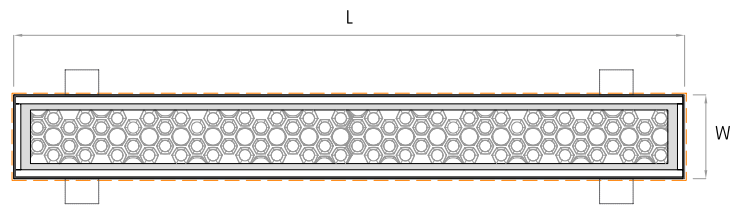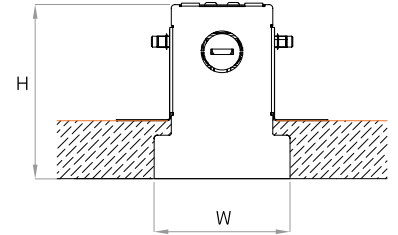

INGROUND

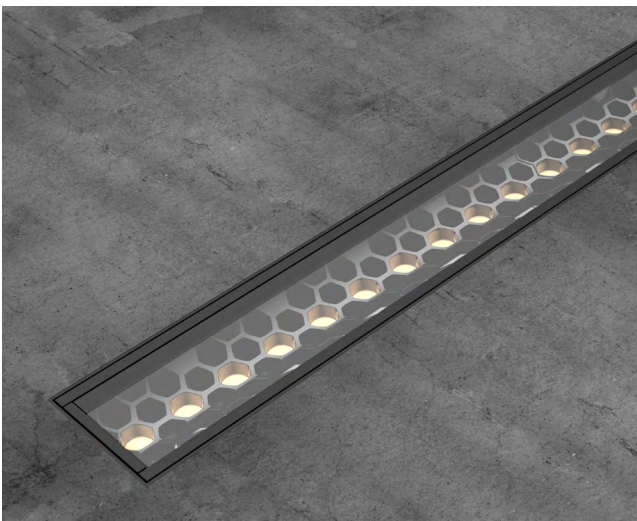

Actual (mm)
L= 325 | 625 | 925 | 1225 |
1525 | Continuous runs
W1= 77 | W2= 95
H= 92

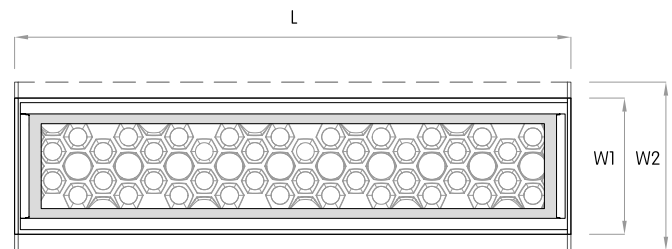
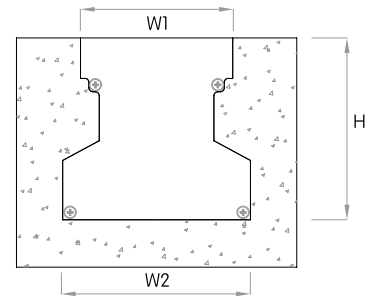


MOUNTING FLEXIBILITY
Per Millimeter

PENDANT



Actual (mm)
L= 622 | 922 | 1222 | 1522 |
Continuous runs
W= 72
H= 91
X= 1500

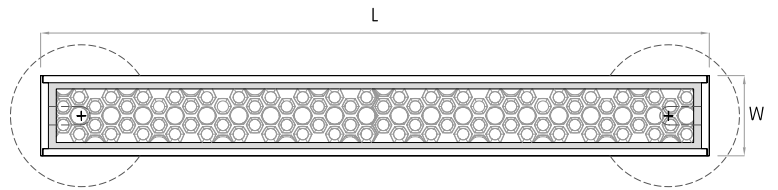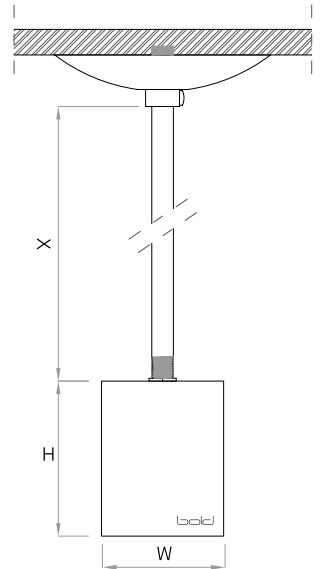

DELIVERED LUMEN OUTPUT

Per Meter

Output Watts CRI +90

STATIC-WHITE		2700K	3000K	3500K	4000K
L	16W	1405 lm	1405 lm	1405 lm	1405 lm
M	33W	2450 lm	2450 lm	2450 lm	2450 lm
H	49W	3375 lm	3375 lm	3375 lm	3375 lm
V	66W	4500 lm	4500 lm	4500 lm	4500 lm

TUNABLE WHITE 2700K-5000K		2700K	5000K
U	33W	2450 lm	2450 lm
A	66W	4500 lm	4500 lm

DIMENSIONS TABLE

					12"	24"	36"	48"	60"						
		Height	Width		Actual Length										
		mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch
		Surface Mounted	91	3 9/16	72	2 13/16			622	24 1/2	922	36 5/16	1222	48 1/8	1522
Recessed with Trim	91	3 9/16	88	3 7/16	335	13 3/16	634	25	934	36 13/16	1234	48 5/8	1534	60 7/16	
Recessed Trimless	97	3 13/16	75	2 15/16			624	24 5/8	924	36 3/8	1224	48 1/4	1524	60	
Pendant	91	3 9/16	72	2 13/16			622	24 1/2	922	36 5/16	1222	48 1/8	1522	59 15/16	
Inground (with housing)	92	3 5/8	95	3 3/4	325	12 13/16	625	24 5/8	925	36 7/16	1225	48 1/4	1525	60	

