

Bold's new 3" streamlined downlight and wallwasher complement the spec grade range of Chameleon downlights by offering an equivalent performance and quality, yet with simplicity that allows it to meet the strictest budgets. Engineered for efficiency and value, the Streamlined Chameleon maintains a high level of flexibility in optical and finish options. It is a great tool for multi-family residential projects as well as large scale corporate and hospitality developments.

- Up to 600lm delivered output
- 0-10V and ELV dimming
- Remodel, Non-IC, IC, and IC airtight (Chicago Plenum) Housings available
- Trim, trimless and millwork mounting options
- High CRI, up to +97 CRI, available upon request
- Dim-to-Warm capability 3000K to 1800K
- Tunable White capability 2700K to 5000K
- 5 years limited warranty
- Wide range of trims and reflectors finishes

\* Downlight is inherently IC rated per ETL testing to UL1598 standard and can be installed without a housing when specified with Standard Output (11 Watts). LED driver current is factory set at 260mA.

### HOUSING SPECS

Code example: **CE-L10R9**

Series	Output	Voltage	Control	Housing	Emergency
<b>CE</b>	<b>L</b> <sup>1</sup> 9W (400lm)	<b>1</b> 120V <b>U</b> <sup>5</sup> Universal 120V to 277V	<b>0</b> Non-Dim	<b>R</b> Remodel	<b>N</b> No
	<b>M</b> <sup>1</sup> 11W (480lm)		<b>1</b> 0-10 to 1%	<b>N</b> Non-IC	<b>9</b> 90 mins
	<b>H</b> <sup>1</sup> 13W (560lm)		<b>2</b> 0-10 fade-off	<b>I</b> <sup>6</sup> IC	
	<b>D</b> <sup>2</sup> 8W (365lm)		<b>D</b> Dali	<b>A</b> <sup>6</sup> Airtight	
	<b>W</b> <sup>2</sup> 12W (562lm)		<b>P</b> Phase ELV & Triac	<b>O</b> No Housing	
	<b>U</b> <sup>3</sup> 8W (445lm)		<b>L</b> Lutron		
	<b>A</b> <sup>3</sup> 12W (620lm)		<b>X</b> DMX		
	<b>C</b> <sup>4</sup> 8W (95lm)				

Code example: **CE-R0-WW-WW-S927**

### MODULES SPECS

Mounting	Trim Color	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	
<b>CE</b>	<b>R0</b> Round Trimless	<b>W</b> <b>W</b> White <b>B</b> Black <b>S</b> Grey <b>X</b> Custom	<b>W</b> Flat White	<b>D</b> Dry <b>W</b> Wet	<b>W</b> Washer	<b>9</b> 90	
	<b>R1</b> Round Trim		<b>B</b> Flat Black			<b>H</b> Thrive	<b>30</b> 3000K
	<b>R3</b> Round Millwork		<b>N</b> Black Nickel				<b>35</b> 3500K
		<b>C</b> Specular Chrome				<b>40</b> 4000K	
		<b>D</b> Diffuse Chrome				<b>WD</b> <sup>7</sup> 3000K - 1800K	
		<b>G</b> Bright Gold				<b>TW</b> <sup>8</sup> 2700K - 5000K	
		<b>E</b> Diffuse Gold					

#### Notes:

- <sup>1</sup> Denotes output at 3000K, unless otherwise noted.
- <sup>2</sup> Denotes output specific to Dim-to-Warm at 3000K.
- <sup>3</sup> Denotes output specific to Tunable White at full on.
- <sup>4</sup> Denotes output at White, 3000K.
- <sup>5</sup> Not applicable for ELV dimming.
- <sup>6</sup> Chicago Plenum rated.
- <sup>7</sup> Dim-to-Warm only available in CRI +90.
- <sup>8</sup> Tunable White available in 0-10V, DMX and DALI.


Consult factory for lead-times.  
Bold Lighting reserves the right to make technical changes without notice.



# OPTICAL FLEXIBILITY

Photometric data: Type C Polar Curves


Wallwash Distribution

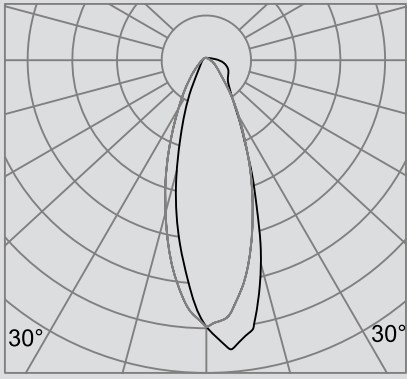


Max. 1,825 cd      1,000 lm

Wallwasher optimal spacing


Plan View

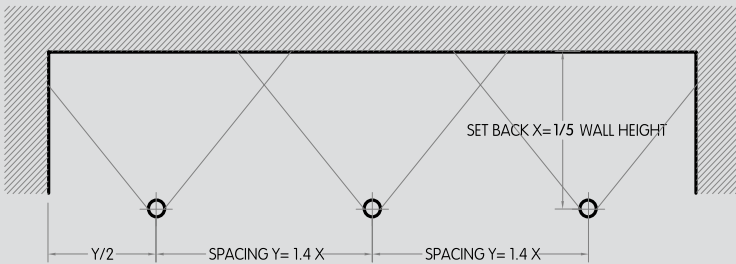


## REMODEL HOUSING

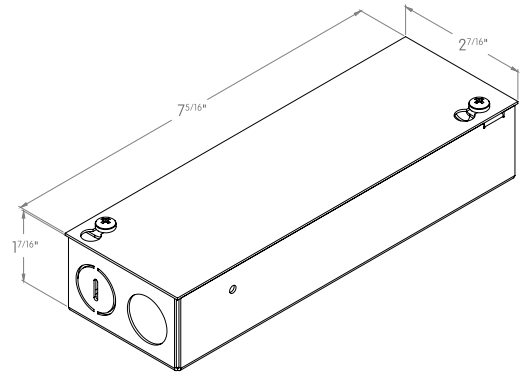

## NON-IC HOUSING

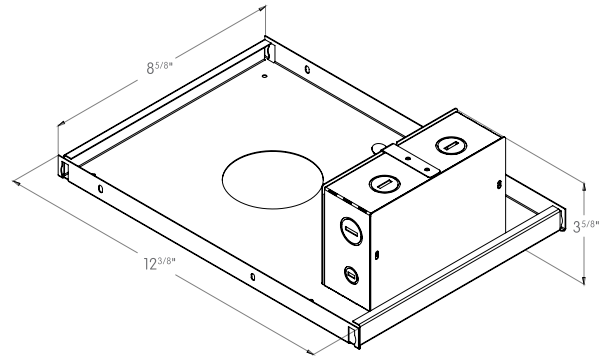

## IC HOUSING & AIRTIGHT

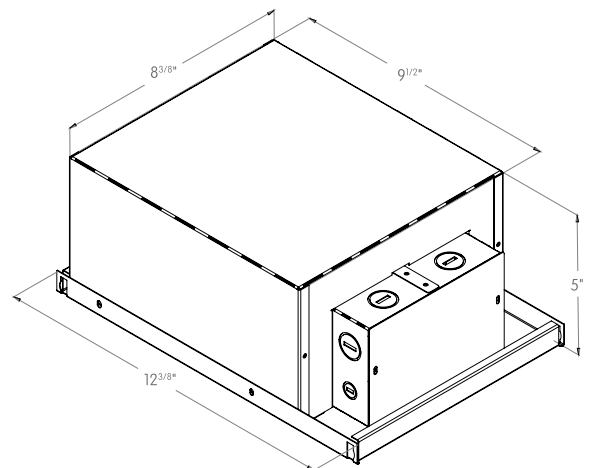



CCC Certified to GB7000





JA8 Certified to Title 24 standards

# MOUNTING FLEXIBILITY



## TRIM CONSTANT FORCE SPRINGS

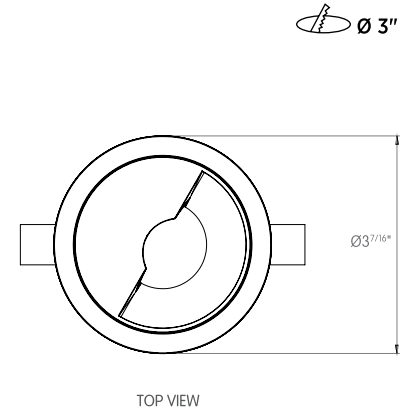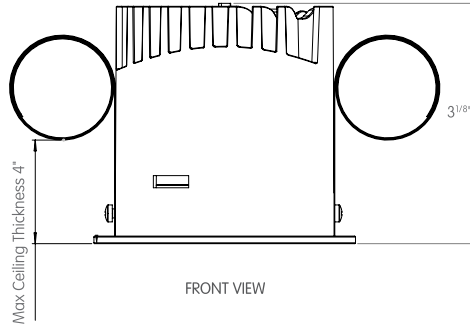

## TRIMLESS

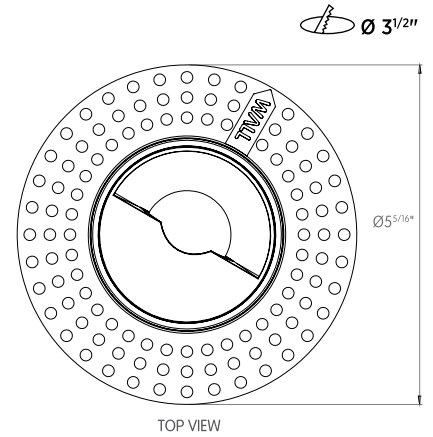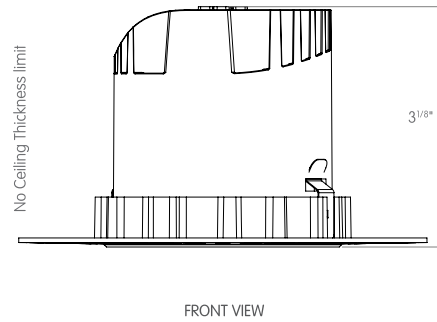

## MILLWORK

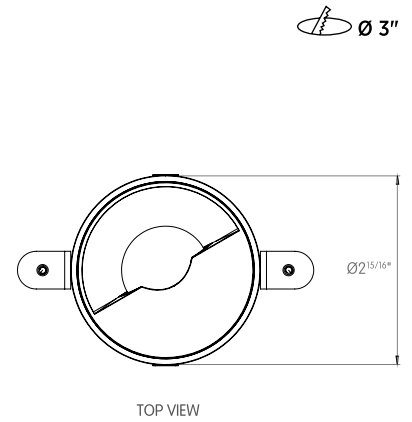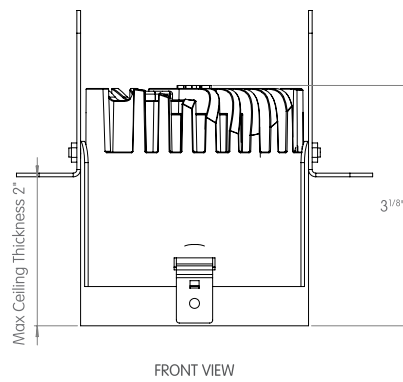

CCC Certified  
to GB7000



JA8 Certified  
to Title 24  
standards

## DELIVERED LUMEN OUTPUT

Output		Watts				CRI +90					
<b>STATIC-WHITE</b>				<b>2700K</b>		<b>3000K</b>		<b>4000K</b>			
<b>L</b>	9W	390lm		400lm		410lm					
<b>M</b>	11W	460lm		480lm		490lm					
<b>H</b>	13W	540lm		560lm		570lm					
<b>DIM-TO-WARM 3000K-1800K</b>				<b>3000K</b>							
<b>D</b>	8W	365lm									
<b>W</b>	12W	562lm									
<b>TUNABLE WHITE 2700K-6500K</b>				<b>2700K</b>				<b>6500K</b>			
<b>U</b>	8W	380lm		445lm							
<b>A</b>	12W	535lm		620lm							
<b>RGBW</b>				<b>R</b>		<b>G</b>		<b>B</b>		<b>W</b>	
<b>L</b>	2W	20lm		125lm		20lm		95lm			
<b>TOTAL</b>	8W	20lm		125lm		20lm		95lm			



CCC Certified  
to GB7000



JA8 Certified  
to Title 24  
standards